



EXPRESS
Window Films

Since 1982, our experience makes yours better.

Specialty Decorative 

SD Blackout

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	2 Mil
Metal	Metal Free
Color	Color in Laminating Adhesive
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	0
Total Solar Energy Rejected	85
Luminous Efficacy	0.00
Shading Coefficient	0.18
Solar Heat Gain Coefficient	0.15
Total Solar Transmittance	0
Total Solar Reflectance	41
Total Solar Absorbtance	59
Visible Light Reflectance (Int)	3
Visible Light Reflectance (Ext)	13
UV Rejected	>99
Glare Reduction	100
Winter Median U-Value	1.00
Emissivity	0.63

Film-To-Glass Approval:

Single Pane <100SF | Double Pane - No

SD Whiteout

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	1.5 Mil
Metal	Metal Free
Color	Dye Free
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	17
Total Solar Energy Rejected	79
Luminous Efficacy	0.68
Shading Coefficient	0.25
Solar Heat Gain Coefficient	0.21
Total Solar Transmittance	12
Total Solar Reflectance	47
Total Solar Absorbtance	41
Visible Light Reflectance (Int)	71
Visible Light Reflectance (Ext)	72
UV Rejected	>99
Glare Reduction	83
Winter Median U-Value	1.12
Emissivity	0.85

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Matte White

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	1.5 Mil
Metal	Metal Free
Color	Dye Free
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	68
Total Solar Energy Rejected	31
Luminous Efficacy	0.84
Shading Coefficient	0.81
Solar Heat Gain Coefficient	0.69
Total Solar Transmittance	61
Total Solar Reflectance	9
Total Solar Absorbtance	30
Visible Light Reflectance (Int)	9
Visible Light Reflectance (Ext)	10
UV Rejected	>99
Glare Reduction	32
Winter Median U-Value	1.09
Emissivity	0.85

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Matte Bronze

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	1.5 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	35
Total Solar Energy Rejected	45
Luminous Efficacy	0.54
Shading Coefficient	0.65
Solar Heat Gain Coefficient	0.55
Total Solar Transmittance	43
Total Solar Reflectance	11
Total Solar Absorbtance	46
Visible Light Reflectance (Int)	8
Visible Light Reflectance (Ext)	9
UV Rejected	>99
Glare Reduction	62
Winter Median U-Value	1.14
Emissivity	0.86

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Matte Grey

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	1.5 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	35
Total Solar Energy Rejected	45
Luminous Efficacy	0.54
Shading Coefficient	0.65
Solar Heat Gain Coefficient	0.55
Total Solar Transmittance	43
Total Solar Reflectance	11
Total Solar Absorbance	46
Visible Light Reflectance (Int)	9
Visible Light Reflectance (Ext)	10
UV Rejected	>99
Glare Reduction	62
Winter Median U-Value	1.14
Emissivity	0.86

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Matte Grey

SD Matte Silver

Category	Architectural
Series	Specialty Decorative
Warranty	Res-Life Com-12 Year Color Stable

Construction:

Ply	2 Ply
Thickness	1.5 Mil
Metal	Vapor Deposition
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	19
Total Solar Energy Rejected	75
Luminous Efficacy	0.66
Shading Coefficient	0.29
Solar Heat Gain Coefficient	0.25
Total Solar Transmittance	15
Total Solar Reflectance	47
Total Solar Absorbtance	38
Visible Light Reflectance (Int)	38
Visible Light Reflectance (Ext)	54
UV Rejected	>99
Glare Reduction	79
Winter Median U-Value	1.05
Emissivity	0.70

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Matte Silver

SD Graphic Blue

Category	Architectural
Series	Specialty Decorative
Warranty	Res-5 Year Com-5 Year

Construction:

Ply	1 Ply
Thickness	1 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	38
Total Solar Energy Rejected	35
Luminous Efficacy	0.50
Shading Coefficient	0.76
Solar Heat Gain Coefficient	0.65
Total Solar Transmittance	55
Total Solar Reflectance	7
Total Solar Absorbtance	38
Visible Light Reflectance (Int)	5
Visible Light Reflectance (Ext)	7
UV Rejected	>99
Glare Reduction	58
Winter Median U-Value	1.14
Emissivity	0.86

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Graphic Green

Category	Architectural
Series	Specialty Decorative
Warranty	Res-5 Year Com-5 Year

Construction:

Ply	1 Ply
Thickness	1 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	36
Total Solar Energy Rejected	39
Luminous Efficacy	0.50
Shading Coefficient	0.72
Solar Heat Gain Coefficient	0.61
Total Solar Transmittance	50
Total Solar Reflectance	7
Total Solar Absorbtance	43
Visible Light Reflectance (Int)	7
Visible Light Reflectance (Ext)	7
UV Rejected	>99
Glare Reduction	60
Winter Median U-Value	1.13
Emissivity	0.86

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Graphic Red

Category	Architectural
Series	Specialty Decorative
Warranty	Res-5 Year Com-5 Year

Construction:

Ply	1 Ply
Thickness	1 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	23
Total Solar Energy Rejected	32
Luminous Efficacy	0.29
Shading Coefficient	0.80
Solar Heat Gain Coefficient	0.68
Total Solar Transmittance	59
Total Solar Reflectance	6
Total Solar Absorbtance	35
Visible Light Reflectance (Int)	4
Visible Light Reflectance (Ext)	4
UV Rejected	>99
Glare Reduction	75
Winter Median U-Value	1.13
Emissivity	0.89

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF

SD Graphic Yellow

Category	Architectural
Series	Specialty Decorative
Warranty	Res-5 Year Com-5 Year

Construction:

Ply	1 Ply
Thickness	1 Mil
Metal	Metal Free
Color	Deep Dip Traditional Dye
Adhesive	Pressure Adhesive

Solar Performance:

Visible Light Transmission	83
Total Solar Energy Rejected	23
Luminous Efficacy	0.92
Shading Coefficient	0.90
Solar Heat Gain Coefficient	0.77
Total Solar Transmittance	72
Total Solar Reflectance	6
Total Solar Absorbance	22
Visible Light Reflectance (Int)	7
Visible Light Reflectance (Ext)	7
UV Rejected	>99
Glare Reduction	9
Winter Median U-Value	1.13
Emissivity	0.89

Film-To-Glass Approval:

Single Pane <100SF | Double Pane <40SF



Since 1982, our experience makes yours better.

East Coast Service Center

22 Shelter Rock Lane #106
Danbury CT 06810

West Coast Service Center

330A East Orangethorpe
Placentia CA 92870

Southeast Service Center


1587-C College Park Business Center Rd
Orlando FL 32804

Direct 203.798.2211

Toll Free 800.FILM NOW (800.345.6669)

Fax 203.798.2253

www.buytint.com

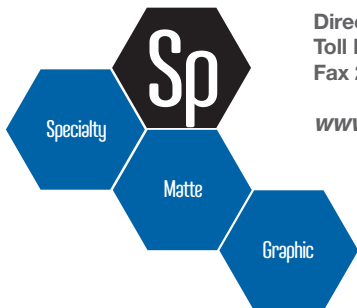

EWf 2030-0918

Specialty Decorative 